

# SERIES 08-81 Probe Style

## Bimetal Temperature Limiting Thermostats

Temperature - Range 35-350°F



**FENWAL**  
CONTROLS

**LICO**

F-08-81-001  
June 2018

www.fenwal-direct.eu  
www.prevent-a-fire.eu

### FEATURES

- Calibrated Settings from 35 to 350°F (2 to 176°C)
- Snap-Action Switching
- Shock and Vibration Resistant
- Hermetically Sealed
- Tamper-Proof, Preset Temperature
- 100% Factory Temperature Tested
- CSA Certified 
- CE Compliant 
- ROHS Compliant



### APPLICATIONS

- Cooking and Food Processing Equipment
- Compressors
- Engines and Transmissions
- Hydraulic Pumps
- Bearing Monitor/Transportation
- Medical and Dental Equipment
- Plastic Machinery
- Process Heating and Curing Ovens

### DESCRIPTION

These low temperature probe-type thermostats are designed specifically for applications where hermeticity and vibration resistance are required. When the preset temperature is reached, a snap-acting bimetal disc mounted in the tip of the probe provides fast thermal response and rapid, positive contact action.

To ensure hermeticity, the probes feature welded, stainless steel construction with glass to metal seals. Switch design and construction provides high vibration and shock resistance sufficient to meet MILSTD-202, Method 204, Condition D. High contact force and the excellent wiping action of the contacts combine to make the probe suitable for light loads of 100 milliamperes or less.


### SPECIFICATIONS


Temperature Range	Tolerances		Differential (Nominals)	Electrical Rating (100,000 Cycles)
	Open	Close		
35 to 240°F (2 to 115°C)	±7°F (±4°C)	±7°F (±4°C)	20°F (11°C)	120/240 VAC 5A (NI) 30 Vdc - 3A 120/240 VA Pilot Duty
241 to 350°F (116 to 176°C)	±10°F (±6°C)	±8°F (±4.5°C)	30°F (17°C)	

### PERFORMANCE

- **Switch Actuation:** SPST open or close on temperature rise
- **Dielectric Strength:** 1500 VAC terminals to case
- **Insulation Resistance:** 100 Megohms at 500VDC
- **Vibration:** Exceeds MIL-STD-202G, Method 204D, Condition D; 20G, 10-2000 Hz
- **Thermal Shock:** MIL-STD-202G, Method 107G, Condition B
- **Mechanical Shock:** MIL-STD-202G, Method 213B; Condition C. 100 G, 10 ms
- **Working Pressure:** 600 PSI up to 350°F (177°C)
- **Ambient Range:** -50 to +350°F (-45 to +176°C)

*Specifications subject to change without notice.*

 CSA File No. 159064  
CAN/CSA C22.2 No. 0-10  
CSA Std C22.1 No. 24-93  
ANSI/UL 873

 CE682409  
BS EN60730-1  
BS EN 60730-2-9


## TEST SAMPLES

Operating samples can generally be supplied for application tests. A completed Fenwal Snap-Disc Application Data form, is available at [www.fenwalcontrols.com](http://www.fenwalcontrols.com) or your local Fenwal sales representative, is required to select and produce an operating sample.

## MATERIALS


- **Body and Tube:** 300 Series Stainless Steel
- **Seal:** all welded construction with glass-to-metal seals
- **Headfill:** Black epoxy
- **Contacts:** Fine Silver

## TERMINATIONS DIAGRAM (SEE TABLE 1)

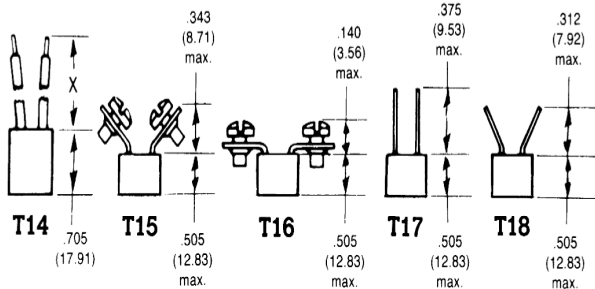

**Note:** Dimensions shown in parentheses are in millimeters.

## MOUNTING DIAGRAM (SEE TABLE 1)

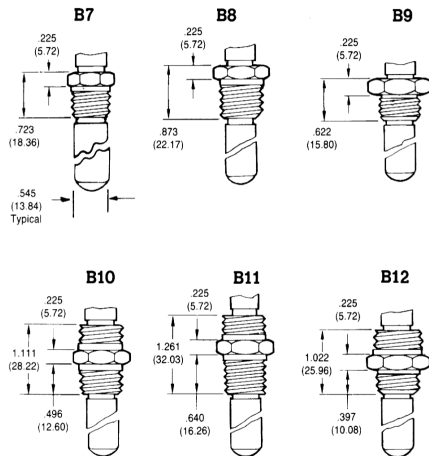

**TABLE 1**

Mounting Configurations Standard Threads	
B7 - 3/8-18PTF, SAE short, 11/16 in. hex	
B8 - 1/2-14PTF, SAE short, 7/8 in. hex	
B9 - 3/4-16UNF3A, 1 in. hex	
Coupling Head	
B10 - 3/8-18PTF, SAE short x 1/2-14NPSM, 7/8 in. hex	
B11 - 1/2-14PTF, SAE short x 1/2-14NPSM, 7/8 in. hex	
B12 - 3/4-16UNF3A x 1/2-14NPSM, 1 in. hex	
Terminations and Positions	
T14 - L - Lead wires	
*T15 - 8-32 screw terminals, 45° offset	
*T16 - 8-32 screw terminals, 90° offset	
T17 - 1/4 in. Quick Connects, parallel vertical	
T18 - 1/4 in. Quick Connects, parallel, 30° offset	
* Available only in B7, B8 and B9 configurations	
Lead Wires (specify length)	
L1 - No Lead Wires	
L2 - 105°C PVC, 18 AWG, 600V insulation	
L3 - 200°C TFE, 18 AWG, 600V insulation	
L4 - 250°C TGGT, 16 AWG, 600V insulation	
Tube Lengths	
P1 - 9/16 in. (14 mm)	P2 - 1 in. (25 mm)
Epoxy Potting Compound	
Black. Consult factory for other colors.	

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721.

© 2018 Kidde-Fenwal Inc. P/N F-08-81-001 Rev AB

### EXPORT INFORMATION (USA)

Jurisdiction: EAR  
Classification: EAR99

This document contains technical data subject to the EAR.

[www.fenwal.com](http://www.fenwal.com)

**FENWAL**  
CONTROLS

**LICO Mechatronic Kft.**  
Raba u. 4.  
H-2030 Erd, Hungary  
Email: [sales@lico.hu](mailto:sales@lico.hu) / [iroda@lico.hu](mailto:iroda@lico.hu)  
Tel: +36 23 520 138

2

**LICO Electronics GmbH**  
Klederinger Strasse 31  
A-2320 Kledering, Austria  
E-mail: [sales@lico.at](mailto:sales@lico.at) / [office@lico.at](mailto:office@lico.at)  
Tel.: +43 1 706 4300

[www.fenwal-direct.eu](http://www.fenwal-direct.eu)  
[www.prevent-a-fire.eu](http://www.prevent-a-fire.eu)